


Technical specifications:

Rototilt RT20B

Multi upper - S40 coupler

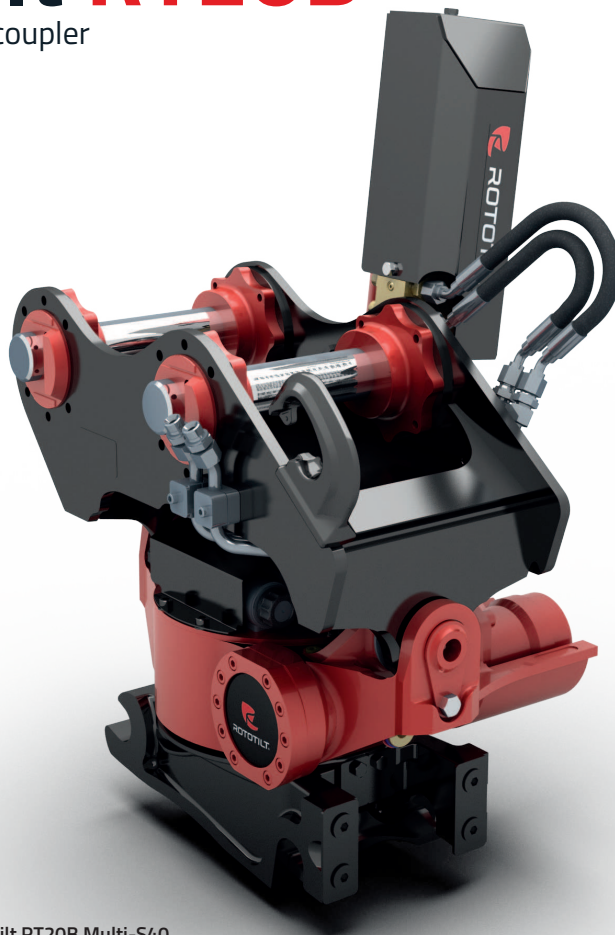

Rototilt RT20B Multi-S40

	RT20B Multi-upper S40 Coupler
Min/max machine weight	3,000 - 6,000 kg / 6,615 - 13,230 lb
Max bucket volume	0.2 m ³ / 0.26 yd ³
Max bucket width	1.2 m / 47.2 in.
Max break out force	45 kN / 7,870 lbf.
Weight (approx.)	155 kg / 342 lb
Tilt angle	2 x 40°
Rotation	unlimited
Rotation speed	1 revolution per 7 seconds @ 30 l/min (7.93 gpm)
Operating pressure	25 MPa / 3625 psi
Max return line pressure	2 MPa / 290 psi
Rotation torque	approx. 3,900 Nm / 2,880 ft.lb @ 25 MPa / 3625 psi
Tilt torque	14,400 Nm / 10,620 ft.lb
Recommended hydraulic flow	40 l/min / 10.57 gpm

Multi-S40 mm / in	
A	554 / 21.8
C	378 / 14.9
D	300 / 11.8
E	Ø40 / Ø1.6
G	325 / 12.8
H	795 / 31.3
I	198 / 7.8
J	230 / 9.1
K	147 / 5.8

